



# FWP NEOFOLD 2

**WOHL + PARTNER**  
Eisfelder Straße 24  
96528 Schalkau  
Germany


[info@wohl-partner.de](mailto:info@wohl-partner.de)

+49.(0).36766.295.0  
+49.(0).172.849.7656

[www.wohl-partner.de](http://www.wohl-partner.de)

FWP  
NE

The manually operating "Neofold 2" folding device is used to fold roof sealing membranes (bitumen, plastic and elastomer membranes) at low temperatures and to test their durability during and after the folding process. This is done according to DIN EN 495-5:2013. This European Standard is intended to assess plastic and elastomeric sheeting in the condition in which it is manufactured or supplied, ie before it is used.

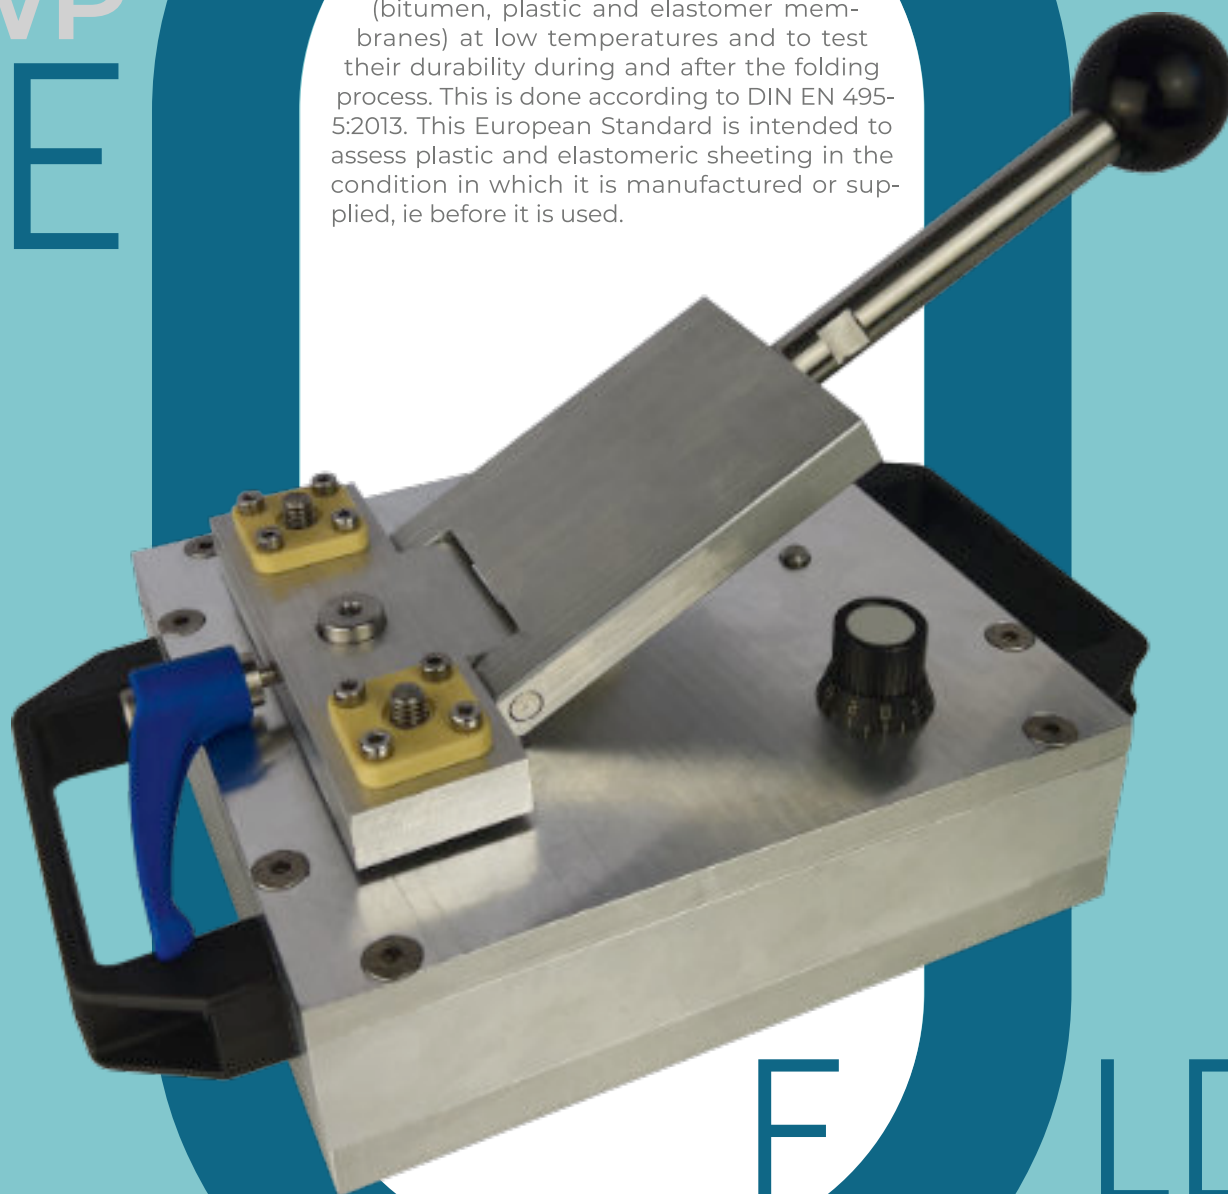

F LD<sub>2</sub>

#### Scope of delivery:

- Folding device „Neofold 2“

type	FWP Neofold 2
width / depth / height	180 mm x 350 mm (incl. handles) x 105 mm
weight	ca. 4,66 kg
maximum test height	10 mm +/- 0,2 mm